




## ROLON C7263-API

### Detailed Specifications



### Precision Printing Technology

<b>Print Speed</b>	3 inches/sec
<b>Print Resolution</b>	300 dpi or 600 dpi
<b>Compatibility</b>	Windows® 2000/Millennium Windows® 98 • Windows® 95 Windows NT® 4.0

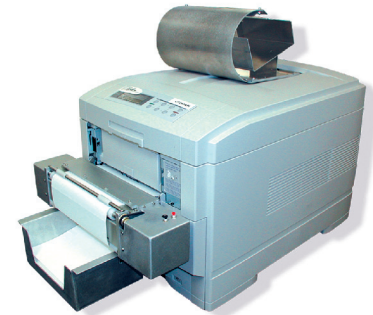

ROLON C7263-API

### Flexible Paper Management

<b>Standard paper tray</b>	530 sheets - Legal - Letter paper
<b>Paper feeder</b>	1100 sheets continuous fanfold
<b>Paper output</b>	1100 sheet stacker
<b>Paper size</b>	8.5" x 6.25" continuous fanfold
<b>Automatic detection</b>	Paper size • "Paper low" sensing

### Operating Conditions

**Storage conditions**  
14° to 109°F (10°C to 32°C)  
for less than 1 year

**Voltage**  
120V AC

**Frequency**  
50/60Hz (-2%)

**Acoustic noise**  
Operating @ 54 dBA  
Standby @ 45 dBA  
Power-save mode  
@ 43 dBA

### Cost-effective Consumables

<b>Toner cartridge</b>	10,000 pages at 5% density
<b>Image drum</b>	Approx, 30,000 pages continuous

### Physical Specifications

**Dimensions (WxDxH)**  
Printer  
16.9" x 24.4" x 16.9"  
43cm x 62cm x 43cm  
**Weight**  
Approx. 105lb (47.5 Kg)

### Network Connectivity

<b>Network Type</b>	10/100Base-T
<b>Protocols Supported</b>	TCP/IP • IPX/SPX • NetBEUI EtherTalk® • NDS® • IPP • SNMP

### Performance Enhancement Technology

400 MHz 64-bit PowerPC 750 processor  
512 MB RAM 2MB Flash memory standard • 5GB Hard Disk Drive  
IEEE 1284 Bi-Directional parallel and Universal Serial Bus  
(USB v1.1)

Auto interface switching

#### Environmentally friendly

Virtually ozone free • Energy Star® approved  
All major plastic parts marked for re-cycling



The Imaging Systems Group Inc.

www.isys-group.com  
Tel : 1-866-415-iSYS(4797)